




LEICA SUMMICRON-M 35 mm f/2 ASPH.



Excellent sharpness, high contrast and a superb resolving power over the entire focusing range are evident at full aperture. With its aperture stopped down modestly to f/4, this versatile lens delivers a maximum of resolving power and contrast. It is all the more impressive because of its virtually perfect absence of distortion. That makes it a world-class lens among fast wide-angle lenses. In spite of its high speed and its superb imaging performance, it is surprisingly small. Every Leica M camera fitted with this lens becomes a highly compact and elegant unit.

— Lens shape

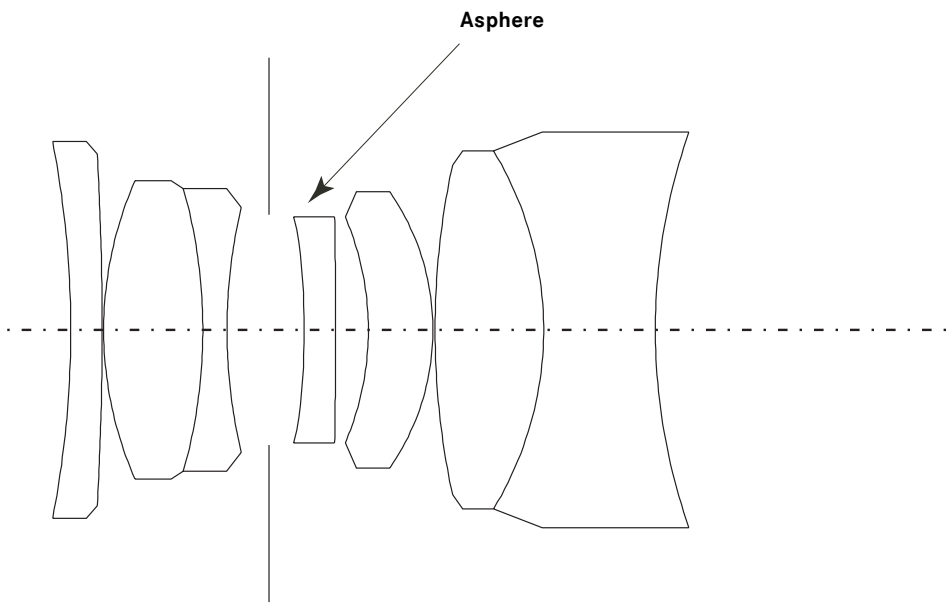






LEICA SUMMICRON-M 35 mm f/2 ASPH.



— Engineering drawing

Technical Data	
Angle of view (diagonal, horizontal, vertical)	63°, 54°, 38°
Optical design	Number of elements / groups: 7 / 5
	Focal length: 35.3 mm
	Entrance pupil: 10 mm (related to the first lens surface in light direction)
	Focusing range: 0.7 m to Infinity
Distance setting	Scale: combined meter/feet-increments
	Smallest object field: 419 mm x 627 mm
	Highest reproduction ratio: 1:17.5
Diaphragm	Setting / Type: with clickstops (including half values), manual diaphragm
	Smallest aperture: f/16
Bayonet	Leica M quick-change bayonet
Filter (type)	internal thread for screw-in type filters E 39
Lens hood	separate, clip-on type
Dimensions and weight	Length: 34.5 mm
	Largest diameter: 53 mm
	Weight: approx. 255 g / 340 g (black anodized- / silver chrome finish)

MTF graphs

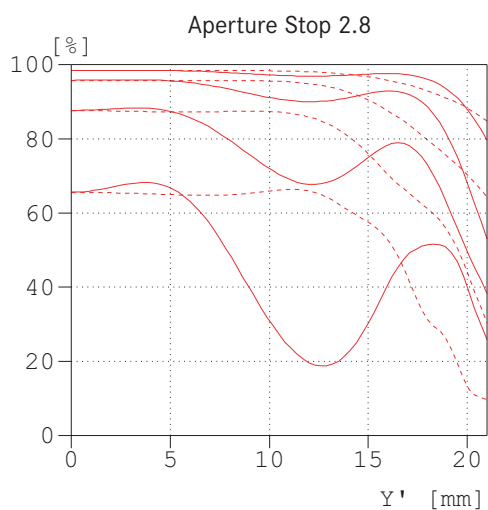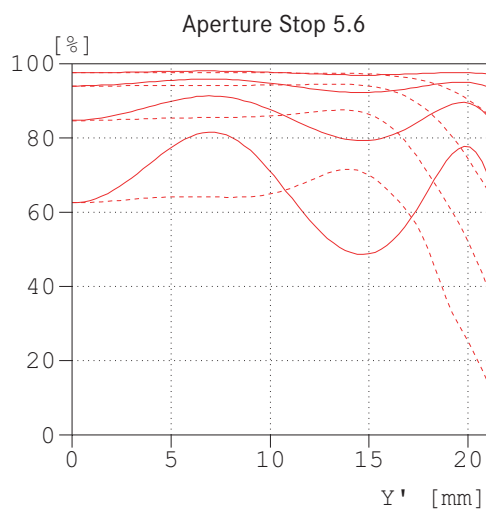
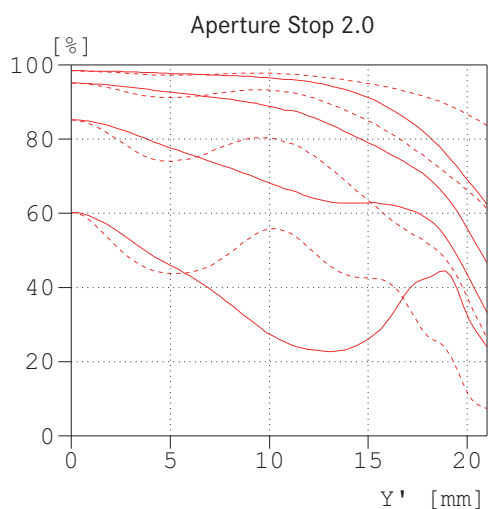


The MTF is indicated both at full aperture and at f/5.6 at long taking distances (infinity). Shown is the contrast in percentage for 5, 10, 20 and 40 lp/mm across the height of the 35 mm film format, for tangential (dotted line) and sagittal (solid line) structures, in white light. The 5 and 10 lp/mm will give an indication regarding the contrast ratio for large object structures. The 20 and 40 lp/mm records the resolution of finer and finest object structures.


— sagittal structures
- - - tangential structures



— Distortion

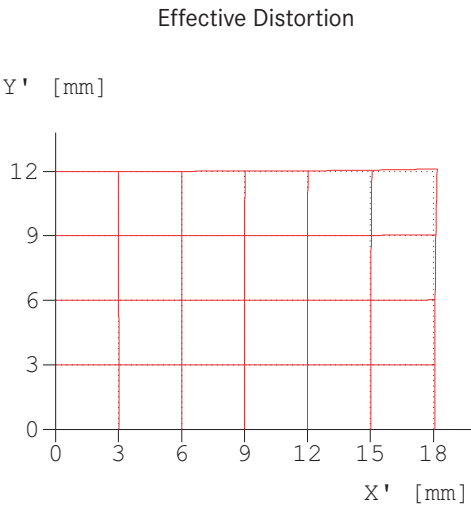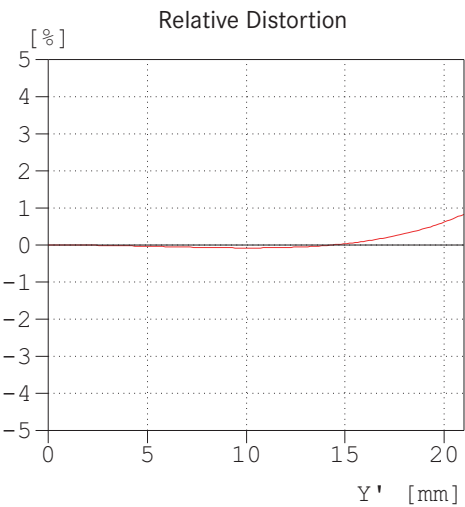

— Vignetting

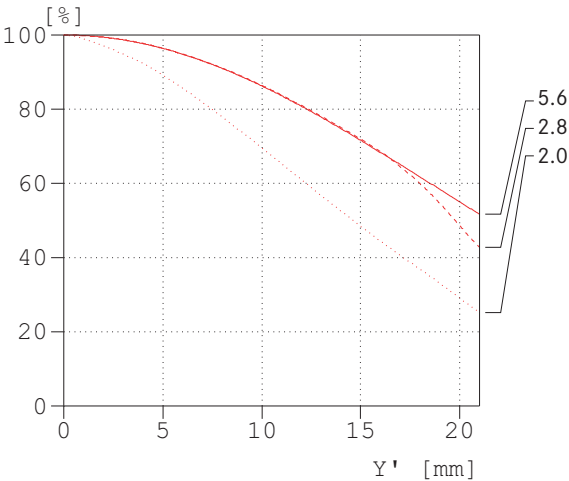

Distortion is the deviation of the real image height (in the picture) from the ideal image height. The relative distortion is the percentage deviation. The ideal image height results from the object height and the magnification. The image height of 21.6mm is the radial distance between the edge and the middle of the image field for the format 24mm x 36mm. The graph of the effective distortion illustrates the appearance of straight horizontal and vertical lines in the picture.

Vignetting is a continuous decrease of the illumination to the edges of the image field. The graph shows the percentage loss of illumination over the image height. 100% means no vignetting.

- sagittal structures
- - - tangential structures



— Depth of field table

	Aperture Stop							Magnification	
	2,0	2,8	4	5,6	8	11	16		
Distance Setting [m]	0,7	0,678 - 0,723	0,670 - 0,733	0,658 - 0,748	0,643 - 0,770	0,621 - 0,804	0,596 - 0,852	0,559 - 0,948	1/17,4
	0,8	0,771 - 0,831	0,760 - 0,844	0,745 - 0,865	0,725 - 0,894	0,697 - 0,942	0,665 - 1,010	0,619 - 1,151	1/20,3
	1	0,954 - 1,051	0,937 - 1,072	0,913 - 1,107	0,882 - 1,156	0,840 - 1,240	0,793 - 1,365	0,727 - 1,642	1/25,9
	1,2	1,133 - 1,275	1,109 - 1,307	1,075 - 1,360	1,032 - 1,437	0,974 - 1,571	0,911 - 1,781	0,822 - 2,296	1/31,6
	1,5	1,396 - 1,622	1,359 - 1,675	1,307 - 1,764	1,243 - 1,898	1,159 - 2,144	1,069 - 2,563	0,947 - 3,816	1/40,1
	2	1,816 - 2,226	1,753 - 2,330	1,666 - 2,508	1,562 - 2,794	1,429 - 3,374	1,293 - 4,567	1,116 - 11,27	1/54,3
	3	2,600 - 3,549	2,470 - 3,826	2,297 - 4,341	2,102 - 5,294	1,865 - 7,912	1,636 - 20,95	1,360 - ∞	1/82,6
	5	3,969 - 6,766	3,671 - 7,867	3,297 - 10,45	2,904 - 18,62	2,466 - ∞	2,076 - ∞	1,647 - ∞	1/139
	10	6,560 - 21,14	5,778 - 37,84	4,896 - ∞	4,071 - ∞	3,252 - ∞	2,602 - ∞	1,957 - ∞	1/281
∞	18,90 - ∞	13,56 - ∞	9,505 - ∞	6,802 - ∞	4,775 - ∞	3,485 - ∞	2,411 - ∞	1/∞	

